

Duplex Multi-Mode Patch Cord

Connector Specifications

LC Connector Compliance	IEC 61754-20, TIA 604-10-A, RoHS
SC Connector Compliance	IEC 61754-4, TIA 604-3, RoHS
FC Connector Compliance	IEC 61754-13, TIA 604-4-A, RoHS
ST Connector Compliance	IEC 61754-2, TIA 604-2, RoHS
LSH Connector Compliance	IEC 61754 - 15, TIA 604 - 16, RoHS
Alignment Technology	Full ceramic ferrule (Zirconia ZrO ₂)
Operating Temperature	-40°C to +85°C
Flammability	UL94 V-0
Durability	< 0.1 dB typical change for > 500 matings

Cable Specifications


- 2 cores duplex fiber optic cable
- 1.8x3.7 mm - 2.0x4.1 mm diameter options
- Length tolerance is ± 50 mm
- Max. Tensile Strength is 300 N
- Min. Bending Radius is 25 mm
- Cable Color:
 - Beige for OM1 and OM2
 - Aqua for OM3
 - Violet for OM4

Optical Performance

Insertion Loss	Multi-Mode ≤ 0.30 dB
IEC 61300-3-4 Method B	
Return Loss	Multi-Mode ≥ 35 dB
IEC61300-3-6 Method B	

End-face Control Parameters

Geometry Inspection	IEC 61755-3-1
Visual Inspection	IEC 61300-3-35

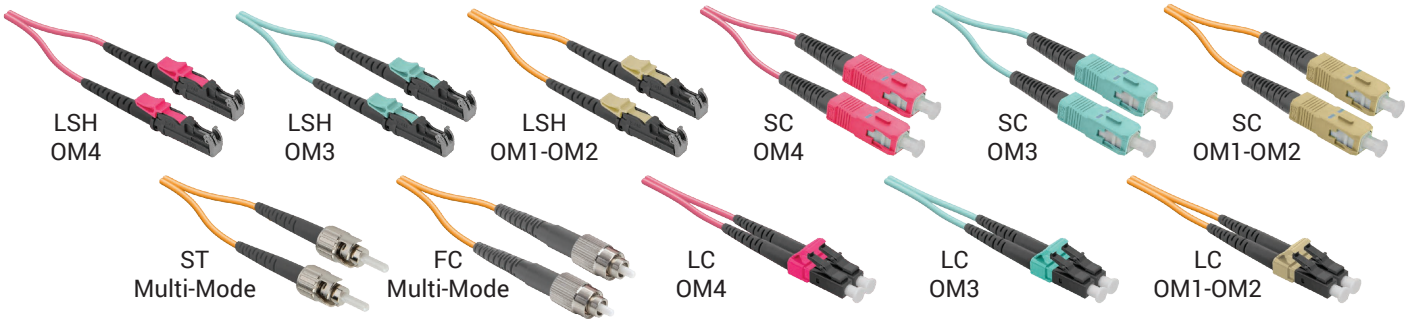

Order Coding

I - PC - 02 - DX - 020 - M4 - SC - LC - 005M

Type	Type	Fiber Count	Cable Type	Diameter	Fiber Type	1. Connector	2. Connector	Length
Indoor: I	Patch Cord: PC	2 Fibers: 02	Duplex: DX	1.8x3.7 mm: 018 2.0x4.1 mm: 020	MM G.651 OM1: M1 MM G.651 OM2: M2 MM G.651 OM3: M3 MM G.651 OM4: M4	SC-UPC: SC LC-UPC: LC FC-UPC: FC ST-UPC: ST LSH-UPC: E2	SC-UPC: SC LC-UPC: LC FC-UPC: FC ST-UPC: ST LSH-UPC: E2	--- M