

Cable Information ;


Fiber Type : Single Mode : 9/125µm A2 ; Multi Mode : 50/125µm OM3/OM4/OM5
 Jacket Color : Yellow (A2) , Aqua(OM3) , Heater Violet(OM4) , Lime Green(OM5)
 Cable Diameter: 3.0 mm
 CPR Grade : Dca, s2, d0, a1
 Jacket Material : LSZH (Low Smoke Zero Halogen)

Label A	
Serial Number	WOXXXX-XXXX
Item Coding	
Length/Polarity	XXX Meters / Pol. X

Optical Performances				
Fiber Type	Connection	IL [dB] Mean/Maximum	RL [dB]	WL [nm]
Singlemode	Angled	≤ 0.10 / 0.35	≥ 60	1310&1550
Multimode	Flat		≥ 20	850&1300

Test Standards and Reporting			
Criteria	Test Standard	Test Frequency	Reporting
Insertion loss	IEC 61300-3-4 / B	100%	100%
Return loss	IEC 61300-3-6	100%	100%
Endface Geometry MFC	IEC 61755-3-31	100%	100%
Polarity(Wiring) Control	TIA-568.3	100%	None
Endface Inspection	IEC 61300-3-35	100%	None
Length Tolerance Control	IEC 60793-1-22 [53]	100%	None

Patch cord lengths and length tolerances		
Total Length L (m)	Length Tolerance (cm)	Special Length Tolerance (cm)
L ≤ 1	-0 / + 5	-0 / + 2
1 > L ≤ 10	-0 / + 10	-0 / + 2
10 > L ≤ 20	-0 / + 20	-0 / + 2
L > 20	± 1 % of L	-0 / + 2

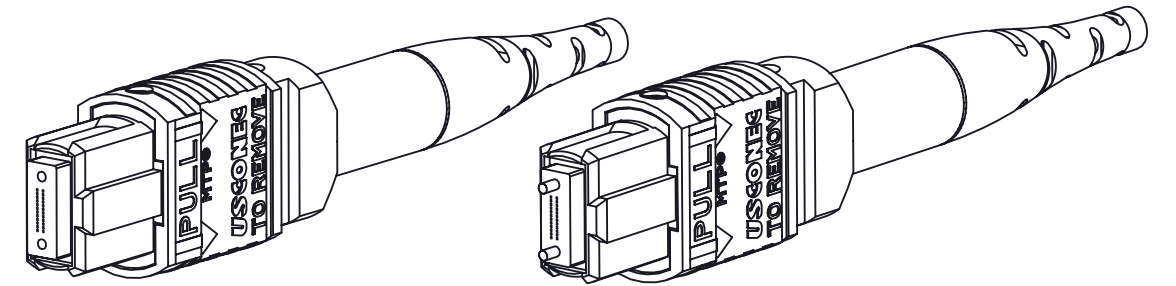

24F MTP Elite Female



24F MTP Elite Male

SAMM TEKNOLOJİ A.Ş. GOSB İhsandede Cd. 800. Sok. No: 802, 41400 Gebze-Kocaeli	DRAWN BY	5038	01.01.2020	PROJECT NUMBER	
	CHECKED BY	1793	01.01.2020	PROJECT REF.	
	APPROVED BY	1793	01.01.2020	CUSTOMER	
ALL DIMENSIONS ARE IN MM. ALL DIMENSIONS APPLY AFTER PLATING	24F MTP Elite to MTP Elite 3.0 mm Fiber Optic Patch Cord Assemblies I-PC-24-MT-030-XX-X-MTPEx-MTPEx-XXXM			REV	01
				SCALE	1:1
				SHEET NUMBER	1 OF 2
				DOC. NO	DES_ASS_200101_01



PROPRIETARY INFORMATION DOCUMENT CONTAINS PROPRIETARY INFORMATION FOR MANUFACTURING FOR ANYONE OTHER THAN SAMM TEKNOLOJİ AND IS DELIVERED ON THE EXPRESSED CONDITIONS THAT IT NOT TO BE DISCLOSED OR REPRODUCED IN WHOLE OR PART, OR USED TECHNOLOGIES WITHOUT ITS WRITTEN CONSENT AND THAT NO RIGHT IS GRANTED TO DISCLOSE OR SO USE ANY INFORMATION CONTAINED IN DOCUMENT

Base-24 MTP to MTP Multi-Fiber Patch Cord Polarity



Type A "Straight Through"

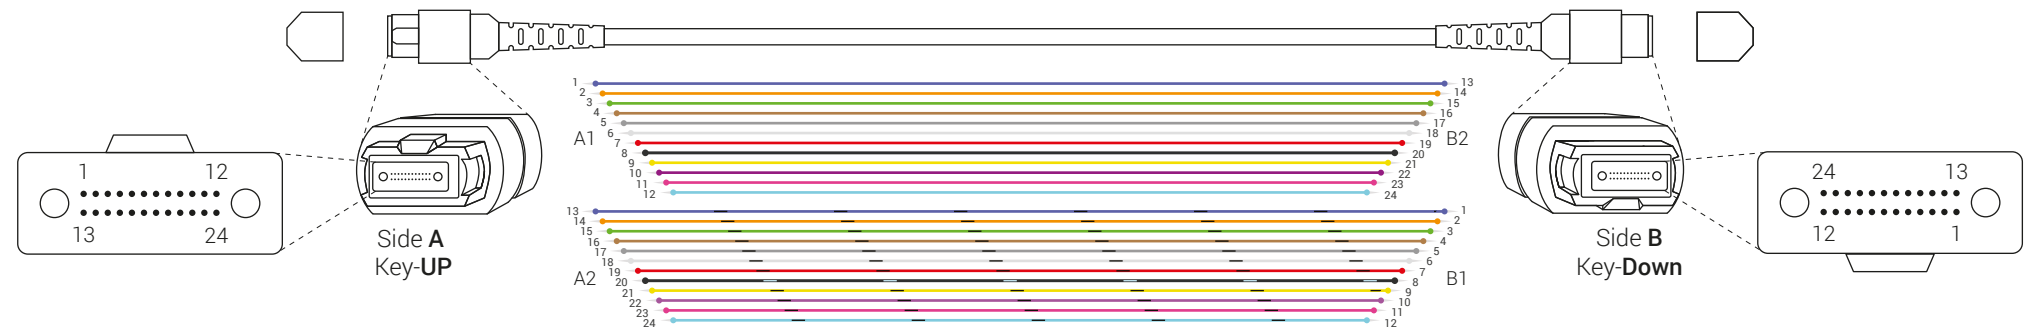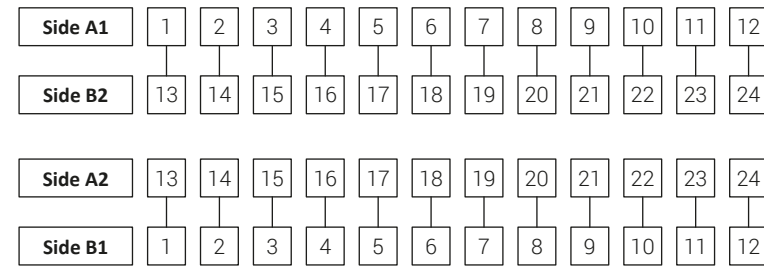

Type B "Cross"

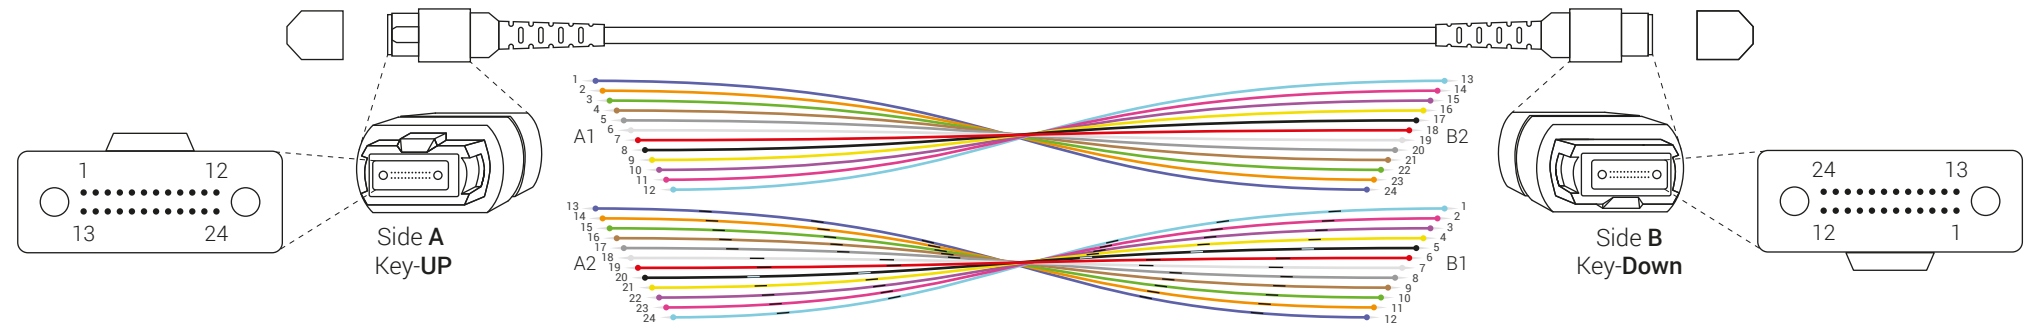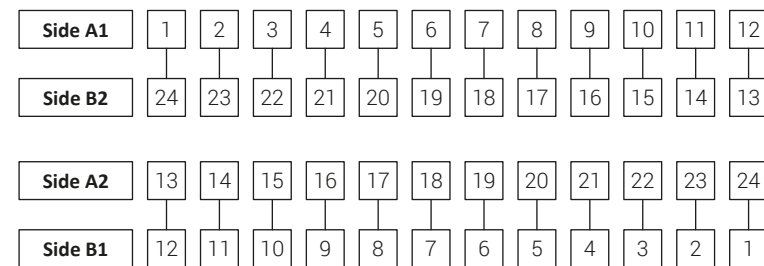

Type C "Cross Pair"

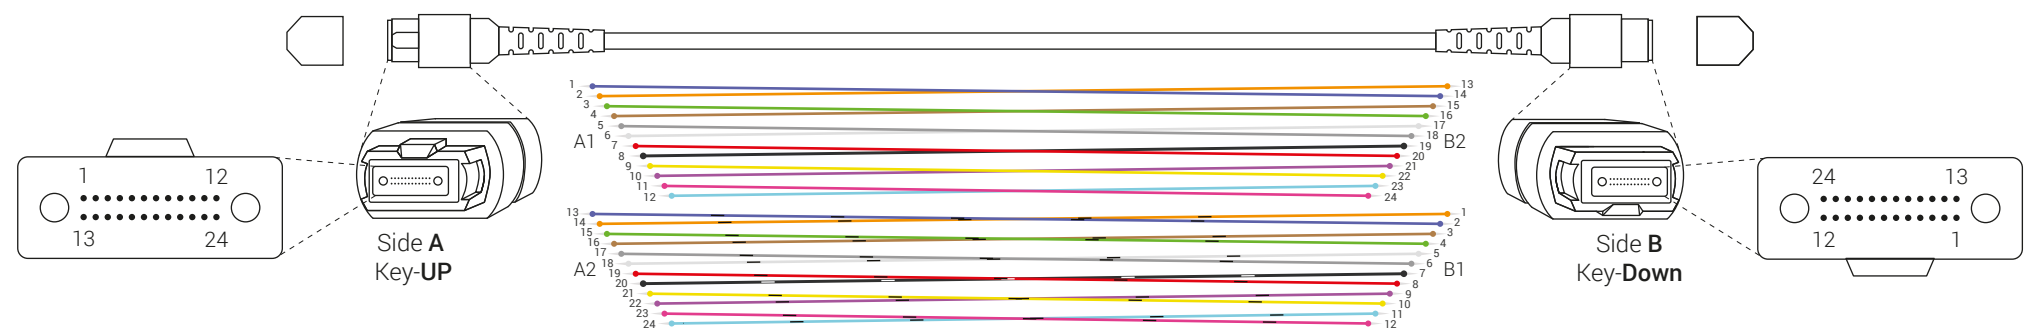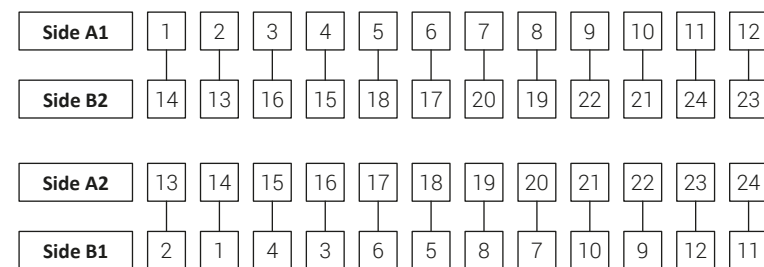

Notes:

1- Side B is flipped upside down for a simpler illustration of the polarity, in practice it is plugged in straight up.

SAMM TEKNOLOJİ A.Ş. GOSB İhsandede Cd. 800. Sok. No: 802, 41400 Gebze-Kocaeli	DRAWN BY	5038	01.01.2020	PROJECT NUMBER	
	CHECKED BY	1793	01.01.2020	PROJECT REF.	
	APPROVED BY	1793	01.01.2020	CUSTOMER	
ALL DIMENSIONS ARE IN MM. ALL DIMENSIONS APPLY AFTER PLATING	24 Fibers MTP to MTP Polarity and Positioning According to TIA-568.3			REV	01
				SCALE	1:1
				SHEET NUMBER	2 OF 2
				DOC. NO	DES_ASS_200101_01

PROPRIETARY INFORMATION DOCUMENT CONTAINS PROPRIETARY INFORMATION FOR MANUFACTURING FOR ANYONE OTHER THAN SAMM TEKNOLOJİ AND IS DELIVERED ON THE EXPRESSED CONDITIONS THAT IT NOT TO BE DISCLOSED OR REPRODUCED IN WHOLE OR PART, OR USED TECHNOLOGIES WITHOUT ITS WRITTEN CONSENT AND THAT NO RIGHT IS GRANTED TO DISCLOSE OR SO USE ANY INFORMATION CONTAINED IN DOCUMENT