

## Distribution Cable up to 24 Fibers




Design Type I-(ZN)H Indoor 3.0 mm

### Properties

- Metal free indoor cable
- Completely dry design
- For direct connector assembly
- High flexibility and light weight
- Halogen free and non-corrosive fire gases
- Low fire load for high safety requirements
- Jacket material in accordance with UL 94V-0

### Cable Construction

1 Fiber	SM or MM (250 μ)
2 Strength Member	Aramid yarn
3 Outer Jacket	LSZH

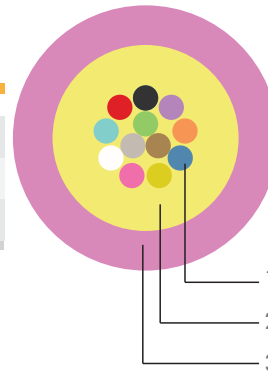

### Sheath Marking

Print Color/Method	Black / Ink-Jet	(length marking 1 m intervals)
Cable Printing	Manufacturer name, fiber count, fiber type, product code, cable type, date, meter marking	

### Optical Characteristics and Physical Properties

Fiber Type		SM	OM1	OM2	OM3	OM4
Jacket Color		Yellow	Orange	Orange	Aqua	Violet
Core Diameter (μm)		9.0 ±0.5	62.5 ±2.5	50 ±2.5	50 ±2.5	50 ±2.5
Cladding Diameter (μm)		125 ±5.0	125 ±5.0	125 ±5.0	125 ±5.0	125 ±5.0
Primary Coating Diameter (μm)		245 ±10	245 ±10	245 ±10	245 ±10	245 ±10
Attenuation (max. in cable) (dB/km)	@1310 nm	≤ 0.40	-	-	-	-
	@1550 nm	≤ 0.30	-	-	-	-
	@850 nm	-	≤ 3.4	≤ 3.0	≤ 3.0	≤ 3.0
	@1300 nm	-	≤ 1.0	≤ 1.0	≤ 1.0	≤ 1.0
Bandwidth (overfilled)	@850 nm	-	200 Mhz*km	500 Mhz*km	1500 Mhz*km	3500 Mhz*km
	@1300 nm	-	500 Mhz*km	500 Mhz*km	500 Mhz*km	500 Mhz*km
Serial Ethernet 1 Gigabit	@850 nm	-	-	-	1000 meters	1040 meters
	@1300 nm	-	-	-	600 meters	600 meters
Serial Ethernet 10 Gigabit	@850 nm	-	-	-	300 meters	550 meters
	@1300 nm	-	-	-	300 meters	300 meters

## Mechanical and Environmental Properties

Test	Test Conditions	Type	Value	Unit	Method
Jacket Diameter	-	All types	3.0	mm	-
Approx. Weight	-	All types	8.0	kg/km	-
Max. Tensile Strength	During installation	All types	200	N	IEC 60794-1-2 E1
	In service		100		
Min. Bending Radius	During installation	All types	20	mm	IEC 60794-1-2 E11
	In service		10		
Crush Resistance	Short term	All types	1000	N/dm	IEC 60794-1-2 E3
	Long term		100		
Impact Resistance	Wp=0.5 J	All types	50	impact	IEC 60794-1-2 E4
Temperature Range	During installation	All types	-10 to +50		IEC 60794-1-22 F12
	In service		-10 to +60	°C	
	In storage		-20 to +70		

## Combustion Properties

Property	Test Conditions	Value	Unit	Result	Method
Fire Load	-	0.17	Mj/m	-	-
Fire Propagation	On a vertical single cable	-	-	passed	IEC 60332-1-2
Smoke Density	-	-	-	passed	IEC 61034-2
Halogen Acid Gas	Jacket material	-	-	passed	IEC 60754-1
Degree of Acidity	Jacket material	-	-	passed	IEC 60754-2

## Cable Coding System

