

CLT, Gel-Filled, Dry Core, Steel Armoured, SJ, PE

Design Type **A-DQ(ZN-GY)(SR)2Y**

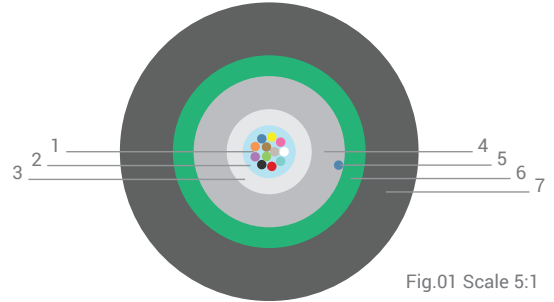
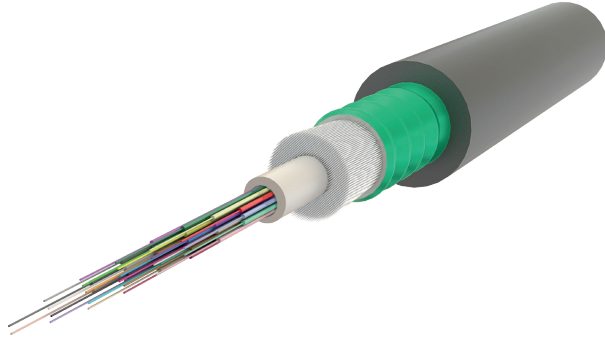


Fig.01 Scale 5:1

Cable Construction

1	Fiber	SM/MM (250 μ)
2	Tube Filling Compound	Thixotropic Gel
3	Loose Tube	PBT
4	Strength Member	Swellable Glass Yarn
5	Ripcord	Polyester
6	Armoured Material	Corrugated Steel
7	Outer Jacket	UV Resistant PE

Properties

Corrugated Steel Armoured Outdoor Cable
Glass yarn strength member
Gel-filled tube
PE outer jacket for use in ducts and unprotected environments
Low fire load for high safety requirements
Longitudinal and transversal water resistant cable
Has a ripcord for easy stripping

Identification

Print Color/Method	White / Ink-Jet	(length marking 1 m intervals)
Sub-Unit Identification	Tube Coloring and Fiber Coloring; According to coloring code (ANSI/TIA-598)	
Cable Printing	SAMM, Design Type, Fiber Count, Fiber Type, WO Number, Date, Meter	

Mechanical and Environmental Properties

(All optical measurements at 1550 nm)

Test	Test Standard	Specified Value	Acceptance Criteria
Tensile Force	IEC 60794-1-2-E1	Installation	$\Delta\alpha \leq 0.05$ dB, $\epsilon_f \leq 0.6\%$
		Operation	$\Delta\alpha$ reversible, $\epsilon_f \leq 0.3\%$
Crush Resistance	IEC 60794-1-2-E3	Max. 2200 N	$\Delta\alpha \leq 0.05$ dB, no damage
Impact	IEC 60794-1-2-E4	Wp=1.5J, R:30cm, 3 impacts at different points	$\Delta\alpha \leq 0.05$ dB, no damage on tubes
Repeated Bending	IEC 60794-1-2-E6	R= 20 x D, 100 N, 35 cycles,	No Damage
Torsion	IEC 60794-1-2-E7	L:1 m, 100 N, $\pm 180^\circ$, 10 cycles,	$\Delta\alpha \leq 0.05$ dB, no damage
Cable Bending	IEC 60794-1-2-E11	R= 20 x D, 4 turns, 3 cycles	$\Delta\alpha \leq 0.05$ dB, no damage
Temperature Cycling	IEC 60794-1-2-F1	-40 to +70 °C	$\Delta\alpha \leq 0.05$ dB, no damage
Water Penetration	IEC 60794-1-2-F5B	3 meter specimen, 1 m water altitude	No leakage in 24 hours
Temperature Range	IEC 60794-1-22 F12	-30 to +60 °C	installation
		-20 to +70 °C	operation
		0 to +70 °C	storage

Ordering Codes

Order Code	Fiber Count	Tube Count	Tube Diameter (mm)	Cable Diameter (mm)	Cable Weight (kg)
A-DQ(ZN-GY)(SR)2Y-1D250-1x4-..-BK	4	1	2.5	7.5	60
A-DQ(ZN-GY)(SR)2Y-1D250-1x8-..-BK	8	1	2.5	7.5	60
A-DQ(ZN-GY)(SR)2Y-1D250-1x12-..-BK	12	1	2.5	7.5	60
A-DQ(ZN-GY)(SR)2Y-1D300-1x24-..-BK	24	1	3.0	7.9	66

* Available fiber types are G652.D, G657.A1, G657.A2, G651.OM2, G651.OM3, G651.OM4

* Sample Code: U-DQ(ZN-GY)(SR)H-1D300-1x24-2D-BK