

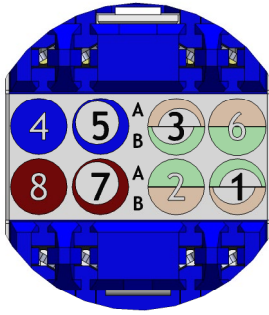








Wire Cap

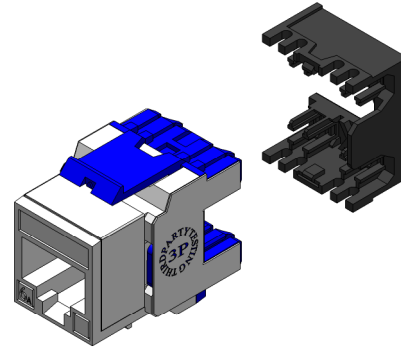

Detail View F
Scale 2 : 1



Material

- Housing: ABS UL94V-0 flame retardancy
- Spring Wire: Phosphor bronze 0.35t, plated with 50u" gold at contact area over 60u" nickel undercoat
- PCB: FR4
- IDC Terminals: Phosphor bronze 0.5t, plated with 100u" nickel
- IDC Block: High-impact Polycarbonate UL94V-0 flame retardancy

Solid Wire Range

- Conductor Diameters: 24AWG - 22AWG
- Insulation Diameters: 0.8mm - 1.1mm
- Cable Diameters: 5mm - 9mm



RoHS

Suggested Panel Cutout

Metal

Plastic

SAMM TEKNOLOJİ A.Ş. GOSB İhsandede Cd. 800. Sok. No: 802, 41400 Gebze-Kocaeli	DRAWN BY	5038	15.12.2021	PROJECT No.	
	CHECKED BY	1793	15.12.2021	PROJECT REF.	
	APPROVED BY	1793	15.12.2021	CUSTOMER	
ALL DIMENSIONS ARE IN MM. ALL DIMENSIONS APPLY AFTER PLATING	Unshielded ISO/IEC Keystone Jack			REV	01
				SCALE	1:1
				SHEET No.	1 OF 1
				DOC. NO	

PROPRIETARY INFORMATION DOCUMENT CONTAINS PROPRIETARY INFORMATION FOR MANUFACTURING FOR ANYONE OTHER THAN SAMM TEKNOLOJİ AND IS DELIVERED ON THE EXPRESSED CONDITIONS THAT IT NOT TO BE DISCLOSED OR REPRODUCED IN WHOLE OR PART, OR USED TECHNOLOGIES WITHOUT ITS WRITTEN CONSENT AND THAT NO RIGHT IS GRANTED TO DISCLOSE OR SO USE ANY INFORMATION CONTAINED IN DOCUMENT