

## 1U Mechanical Sliding - Patch & Splice Management Panels



Front Patching Shelves are used to terminate and distribute optical fiber cables, termination box is ranging from 12 ports to 24 ports (12 fibers to 48 fibers). They are convenient equipment to organize and connect the fiber optic links. It is suitable for the use in telecommunication network, central office optical cable system and premise fiber networks.

Typical type of our fiber patch panels are rack mounted, they are with optional different kinds of fiber optic adapters ports and pre-installed inner trays and accessories, optional pigtailed with different types, common style is SC/FC/ST/LC, E2000 types can be custom made based on quantity.






### Features

- Easy time-saving installation
- Different front panel options
- Compact and safe design
- Rear cable entry
- Captive Panel Screws ensure easy/safe locking of the drawer
- Easy connector and cable accessibility
- Bend radius protection

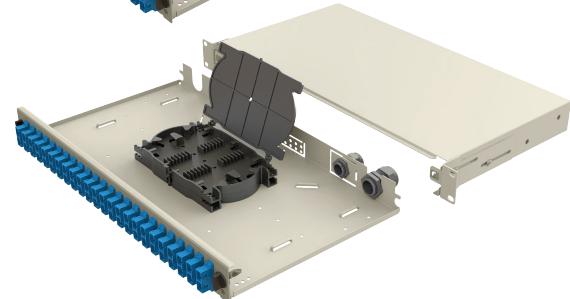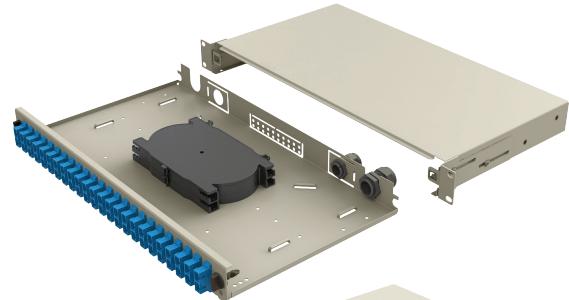


### Dimensions

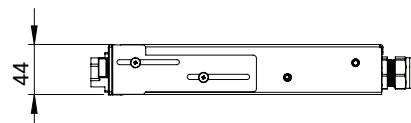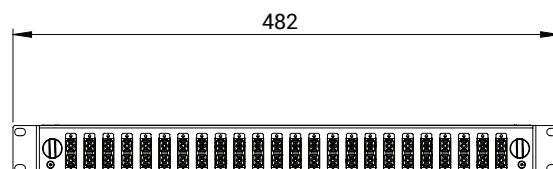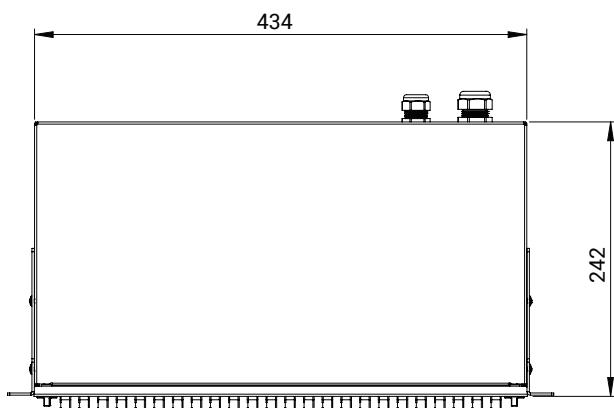

## 1U - Mechanical Sliding - Front Panels

Choose Front Panel				
Front Panels		Panel Code	Hole Count	Available Adapter- Fiber Capacity
	EFP11		12	SC Simplex - 12 Fibers LC Duplex - 24 Fibers E2000 Simplex - 12 Fibers
	EFP12		12	SC Duplex - 24 Fibers LC Quad - 48 Fibers
	EFP13		24	SC Simplex - 24 Fibers E2000 Simplex - 24 Fibers
	EFP14		24	SC Duplex - 48 Fibers
	EFP15		24	SC Simplex - 24 Fibers LC Duplex - 48 Fibers E2000 Simplex - 24 Fibers
	EFP16		24	FC Simplex - 24 Fibers ST Simplex - 24 Fibers

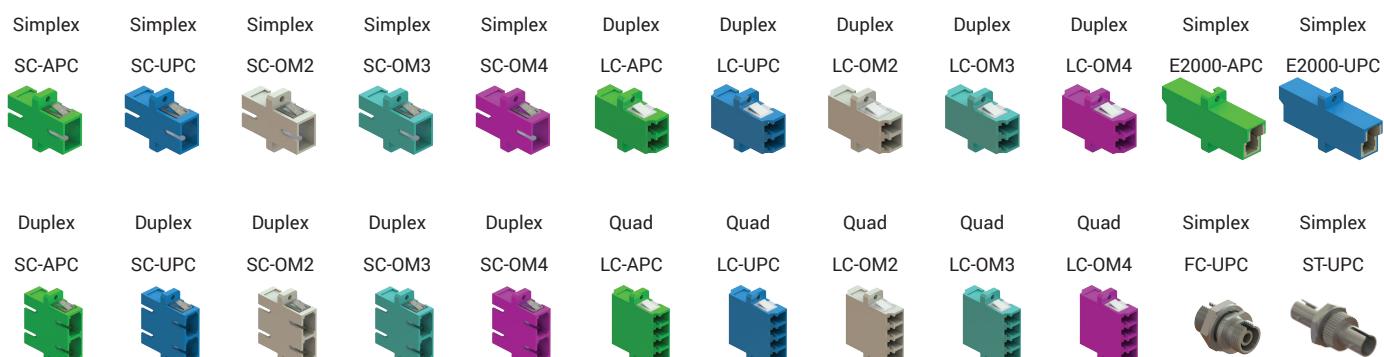

## Ordering Coding 19" Front Patch Shelves

(sample coding)

EFRPS - 1U - MS - EFP11 - A2 - SC - SX - 12

Height	Rail System	Front Panel	Fiber Type	Connector	Port Options	Fiber Count		
44 mm: 1U	Mechanical Sliding: MS	Panel-11: EFP11 Panel-12: EFP12 Panel-13: EFP13 Panel-14: EFP14 Panel-15: EFP15 Panel-16: EFP16	Empty: G657.A1: G657.A2: G652.OM2: G652.OM3: G652.OM4:	NN A1 A2 M2 M3 M4	Empty: SC/UPC: SC/APC: LC/UPC: LC/APC: FC/UPC: FC/APC: ST/UPC: E2000/UPC: E2000/APC:	NN SC SA LC LA FC FA ST E2 EA	Empty: Simplex: Duplex: Quad:  NN SX DX QD	Empty: 12 Fibers: 24 Fibers: 48 Fibers:  NN 12 24 48